



# PRODUCT CATALOG

2020 Q1

**Nexmosphere**

High Tech Campus 10 (M $\mu$  building)  
5656 AE Eindhoven • The Netherlands

T +31 40 240 7070  
E [info@nexmosphere.com](mailto:info@nexmosphere.com)

## XPERIENCE

The definition of an experience is something that **happens to you** that **affects how you feel**. A true experience is an event that addresses the senses, creates emotion and in doing so, is **memorized**.

Nexmosphere products are used to create interactive **Xperiences** with technology. These Xperiences impact someone's in-store experience by inviting them to explore merchandise, providing more info through visual or audio content and offering selection guidance while setting the right atmosphere with beautiful lighting effects and communicating a brand's story.

## ELEMENTS


Nexmosphere Elements are our collection of sensors and actuators, such as pick-up sensors, presence sensors or LED. By combining different Elements on our Xperience controllers, interactive experiences can be created.

## CONTROLLERS

Xperience controllers are used to combine Elements onto and connect them to any Digital Signage player or PC. The controller is the part of the system that translates the communication coming from the Elements to the connected device and vice versa. Some of the controllers have additional functionalities embedded into them such as LED control or audio switching.

## X-TALK

The connection method between Nexmosphere's Elements and controllers is called X-talk. Calculate the number of X-talk channels needed by adding up the number of Elements used and pick the right Controller model for the job.

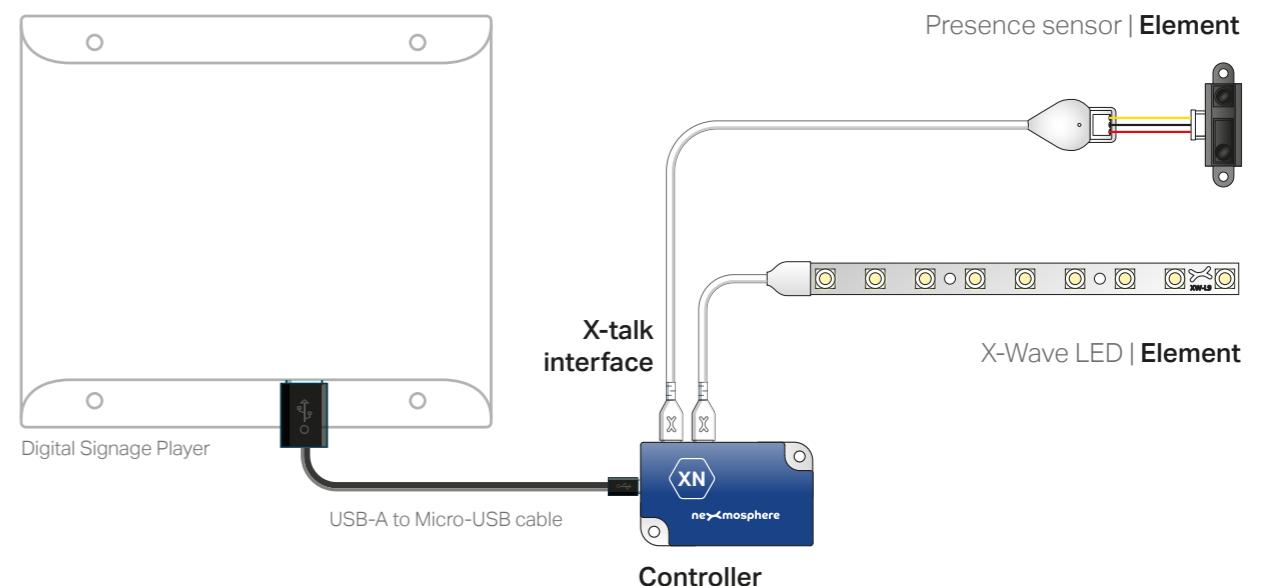

## ELEMENTS | sensors and actuators

<b>X-Eye Range</b>	people tracking	5
<b>XR Range</b>	RFID pick-up sensors	6
<b>XF Range</b>	wireless pick-up sensor	7
<b>XW Range</b>	animated LED lighting	8
<b>XZ Range</b>	object detection	9
<b>XE Range</b>	environmental sensing	10
<b>X-Snapper Range</b>	wired pick-up sensor	11
<b>XD Range</b>	easy interfacing	13
	wired pick-up sensors	14
<b>XT Range</b>	capacitive touch & buttons	15



## CONTROLLERS | connecting Elements

<b>XN Range</b>	nano Xperience controllers	18
<b>XC Range</b>	compact Xperience controllers	19
<b>XM Range</b>	modular Xperience controllers	21



# ELEMENTS

## sensors and actuators



## X-EYE RANGE | people tracking

The Nexmosphere XY range offers a variety of sensors that detect and analyze presence, distance and demographics of the people in front of your digital signage or POS installation. Whether you want to increase the impact by triggering the right content at the right time, want to program attractive lighting changes and increase engagement, or want to collect valuable data, the XY range has a sensor which provides the input to do so.

### X-EYE PRESENCE & PROXIMITY




The X-Eye Presence sensors are narrow-beam IR proximity sensors that detect if an object or person is present and indicate the distance to the person from the sensor.

#### IR proximity technology

XY-11x	05cm - 80cm
XY-14x	15cm - 150cm
XY-17x	50cm - 500cm

### X-EYE MOTION



The X-Eye Motion sensor detects the amount of motion in its detection field. It can be installed behind any non-metal surface, resulting in an invisible embedded sensor solution.

### X-EYE HEATMAP



The X-Eye Heatmap casts an invisible floor grid while locating people and tracking their movement within the grid using GDPR-compliant technology.

#### Doppler radar

XY-320	1.2m - 10m 10.525 Ghz
--------	--------------------------

#### IR Heat sensing grid

XY-430	3m x 1.5m area 16 x 3 resolution
--------	-------------------------------------

**new product**  
consult timing and availability

### X-EYE GENDER



The X-Eye Gender sensor detects the gender and age range of a person. It does not require network connectivity and doesn't store video data, making it 100% GDPR-compliant.

#### Gender recognition Age estimation

XY-510	15cm - 120cm
XY-520	35cm - 250cm

## XR RANGE | RFID pick-up sensors

The Nexmosphere XR range offers the products needed to build wireless pick-up sensors using RFID technology. The antenna driver detects a tag as soon as its close to the antenna and communicates the number of the tag back to the Xperience controller. Adhere the tags under the displayed merchandise and trigger the associated video content when the products are picked-up or placed down.

### XR ANTENNAS



The XR antenna is a slim, easy to built-in RFID antenna. It can be hidden behind a variety of non-metallic design materials like acrylics, wood, glass and stone. Define your detection surface area and match it with the right shape and size antenna for your product and application.

#### RFID technology

XR-C05	circular, 50mm
XR-C10	circular, 100mm
XR-A45	rect., 297x148mm
XR-A50	rect., 210x148mm
XR-A55	rect., 210x74mm
XR-A60	rect., 148x106mm
XR-A66	rect., 148x52mm
XR-A70	rect., 105x74mm
XR-A80	rect., 74x52mm 100mm cable

### XR ANTENNA DRIVER



The XR Antenna driver receives and processes the signals coming from the connected antenna and the RFID tag. It generates the triggers that are sent to the connected Xperience controller. It can be used in combination with any of the antenna, and -controller models.

#### RFID technology

XR-DR1	13.56 Mhz RFID Multi-Tag detect
--------	------------------------------------

### RFID TAGS



The standard tags for use with this product range, are industry standard tags that can be ordered already programmed with their respective numbers, or as empty tags that still require programming and labeling.

#### RFID technology

XNR tag	26mm, programmed
XNB tag	26mm, unprogrammed
all	IC S50



## XF RANGE | wireless pick-up sensors

The Nexmosphere XF range offers an innovative way to use wireless pick-up sensors without the need for installing any hardware within your POS furniture or shelving. The battery-powered sensors can be placed in, or -under your merchandising and facilitate triggering the programmed content and/or lighting effects on the Xperience controller when the merchandising is interacted with by the shopper. Use this technology to easily transform existing store installations into interactive ones with minimal effort.

### P3 WIRELESS PICK-UP SENSOR



The P3 sensor is a battery-powered pick-up sensor that can be placed in, or -under merchandising. The sensor detects any change of positioning when the shopper interacts with the merchandising on display and translates this into triggers that are sent towards the controller unit that can be invisibly installed at distance from the actual sensor.

#### Pick-up detection (accelerom.) Wireless comm. 2.4Ghz ANT+

XF-P3W	white housing
XF-P3B	black housing
XF-P3N	no housing

all	2 years avg. battery life 8-10m range 32mm diameter
-----	---

**new product**  
consult timing and availability

### EM-F WIRELESS X-TALK INTERFACE



The EM-F Extension Modules receive the signals coming from the P3 sensors after these have been paired with a wireless X-talk interface. Each P3 sensor connects to its own wireless X-talk interface on the EM unit. Combine a maximum of 5 EM units onto the controller unit, allowing up to 40 sensor connections on one single controller. All EM modules only work in combination with an XM Xperience Controller.

#### Wireless X-talk receiver

EM-F1	1 channel
EM-F4	4 channel
EM-F8	8 channel

**new product**  
consult timing and availability

## XW-RANGE | animated LED Lighting

The Nexmosphere X-Wave range consists of a variety of animated LED lighting products. They allow incorporating creative lighting effects in your installations that enhance interactivity. Use animated lighting to attract, highlight, contrast, indicate and guide.

### X-WAVE



The X-Wave is a rigid linear LED board fitted with RGB LEDs. Set any RGB color to match or contrast merchandising or brand style. Settings as dimming speed, light output and sinus repetition can be adjusted to match the required lighting behavior and effect.

#### Linear wave lighting

XW-L56	5 LEDs
XW-L96	9 LEDs

### X-WAVE LINEAR INTERFACE



The X-Wave Linear interface enables Wave LED control over flexible pixel LED strips. Each interface allows connection to one LED strip. Strips can be divided into segments over which the X-Wave animations can be executed.

#### Pixel LED strip interface Wave animation control

XW-DL6	max. control 120 LEDs max 12 LEDs / segment
also available as MicroModule, assembled on XN-135 (XN-138M8L)	

### X-WAVE SELECTION INTERFACE



The X-Wave Selection interface enables Selection LED control over flexible pixel LED strips. Each interface allows connection to one LED strip. It allows splitting up LED strips into segments that can be illuminated to indicate products that correspond to selection inputs given by the shopper.

#### Pixel LED strip interface Selection animation control

XW-DS6	max. control 120 LEDs max. 26 segments max 15 LEDs /segment
also available as MicroModule, assembled on XN-135 (XN-138M8S)	

### X-WAVE COLOR



The X-Wave Color LED is an X-Dot housed product fitted with one RGB pixel LED. It can be programmed in any color and fade from one color to another. Use it as a visual indicator to mark a certain spot or product of interest.

#### RGB indication LED

XW-C56	RGB LED Glow animations
--------	----------------------------



## XZ RANGE | object detection

The Nexmosphere XE range offers a variety of sensors that detect the status of the objects on which they are applied. By detecting the object status, we enable the possibility to log and communicate these values, as well as actively respond to critical threshold values.

### HUE COLOR SENSOR



The XZ- Hue color sensor can detect the color of objects that are held against or placed upon the sensor. Any color can be detected and communicated back to any Xperience controller. To be used in applications where the required content trigger is linked to the color of an object.

#### Color sensing

XZ-H60	Hue Saturation Brightness
--------	---------------------------------

**new product**  
*consult timing and availability*

### LIGHT SENSOR



The XZ- Light sensor can detect the amount of light that falls in the sensor. This information can be used to determine whether merchandise is placed on top of the sensor or not, to create Lift & Learn or Place & Learn applications whenever RFID or battery-powered sensors can't be applied.

#### Object Pick-up detection Light sensor

XZ-L20	adj. trigger values X-Dot form factor
--------	--

### ANGLE SENSOR



The XZ- Angle sensor can detect the orientation of the sensor at any giving moment, by calculating its angle as opposed to its default relative position that was previously set.

#### Angle orientation detection

XZ-A40	3-axis orientation adj. trigger positions
--------	--

**new product**  
*consult timing and availability*

## XE-RANGE | environmental sensing

The Nexmosphere XE range offers sensors that analyze and communicate environmental conditions. By detecting the surrounding circumstances, we enable the possibility to log and communicate these values, as well as actively respond to certain critical threshold levels such as high temperature.

### AMBIENT LIGHT SENSOR



The XE- Ambient light sensor detects the amount of light in its surroundings and communicates the amount of lux back to the Xperience controller, facilitating adjustment of lighting levels based on environmental light conditions.

#### Ambient light sensor (lux)

XE-A20	1 - 120.000 lux
--------	-----------------

**new product**  
*consult timing and availability*

### TEMPERATURE SENSOR



The XE- Temperature sensor detects temperature and humidity levels and can be adhered to heat sensitive objects. Triggers can be used to build a log file for warranty evaluation and to send messages to centralized systems to help protect installations. This simplifies compliance to a growing body of regulations within the digital signage industry.

#### Temperature detection Humidity detection

XE-T50	-25°C - +75°C temp 1 - 99% Humidity
--------	--

**new product**  
*consult timing and availability*



## X-SNAPPER RANGE | wired pick-up sensors

The Nemosphere X-Snapper range offers magnetic pick-up sensors that can also be used as active security devices. Merchandise is mounted onto the sensor and when lifted or placed back, the X-Snapper sends a trigger to the connected Xperience controller, facilitating content triggering and measurement of pick-up durations. The security function sends triggers whenever merchandising is removed, the wire is cut or pulled out. This sensor is specially designed to attach to handheld devices of different sizes and shapes.

### XS SERIES



The XS-Snapper detects either release from, or connection with, -its passive counter block and sends triggers to the connected Xperience controller accordingly, both registering pick-ups and place downs. Use the XS-Snapper for presenting smaller, handheld devices such as shavers, toothbrushes or phones.

#### Wired pick-up sensor (HALL)

##### Active security

*white housing:*

XSW-X16	pick-up only
XSW-X26	security only
XSW-X36	pick-up and security
XSW-NOS	counter block

*black housing:*

XSB-X16	pick-up only
XSB-X26	security only
XSB-X36	pick-up and security
XSB-NOS	counter block

*all* | coiled cable

### XL SERIES



The XL-Snapper detects either release from, or connection with, -its passive counter block and sends triggers to the connected Xperience controller accordingly, both registering pick-ups and place downs. Use the flat XL-Snapper for presenting larger devices like tablets and the curved model for hair stylers.

#### Wired pick-up sensor (HALL)

##### Active security

*white housing, flat cover*

XLFW-X16	pick-up only
XLFW-X26	security only
XLFW-X36	pick-up and security
XLFW-NOS	counter block

*black housing, flat cover*

XLFB-X16	pick-up only
XLFB-X26	security only
XLFB-X36	pick-up and security
XLFB-NOS	counter block

*all options also available with curved cover. E.g.:*

XLCW-X36	pick-up and security
XLCB-X36	pick-up and security

## X-SNAPPER ACCESSORIES | pedestals, holders & spares

The Nemosphere X-snapper range is complemented by accessories and spare parts specifically designed for instore use. This makes completion and installation of POS designs fast and easy while providing a professional finish.

### X-SNAPPER DOUBLE



The X-Snapper double consists of two magnetic X-snapper blocks attached to a single continuous spiral cable. This double snapper is not attached to an Xperience controller and does not send triggers. It can be used to securely display products and make sure they are not misplaced after use.

#### Passive merchandize security

XSW-X1S	100mm cable
XSW-X2S	200mm cable
XSW-X3S	300mm cable

XLFW-X1S	100mm cable, XL
XLFW-X2S	200mm cable, XL

*XL versions also available with curved cover*

### X-SNAPPER STAND



The X-Snapper stand is a pedestal designed for use with the X-Snappers. The stand is screw fixed in the POS furniture and the X-Snappers are installed on top of its surface. It allows placement of the merchandize at an angle facing the shopper, giving a 'floating' appearance while the stand itself remains visually hidden behind the merchandise.

#### Merchandise placement

XAT-HL2	25°, low height
XAT-HL4	45°, low height
XAT-HM2	25°, medium height
XAT-HM4	45°, medium height
XAT-HH2	25°, high height
XAT-HH4	45°, high height

*all* | transparent

### X-SNAPPER SPARE TAPE



The X-Snapper spare tapes can be used when merchandising is replaced on the POS because of maintenance reasons or the renewal of merchandise during seasonal rotation.

#### Double-sided tape

XAS-TS1	10-pack
XAS-TS5	50-pack
XAS-TS9	1365 roll

*all* | double-sided industrial standard

### PRICE TAG HOLDER



The price tag holder is designed for use with the X-Snapper stand. It can be screwed in place using the screw fixation of the X-snapper stand. This leaves dedicated space to the side of the X-snapper stand where you can place price and product information.

#### Double-sided tape

XAT-PLS	low, short length
XAT-PLL	low, long length
XAT-PLL	high, short length
XAT-PHL	high, long length

*all* | 20° viewing angle transparent



## XD RANGE | easy interfacing

The Nemosphere X-Dot range offers a variety of functions divided into two subdivisions: easy interfacing and wired pick-up sensors. They share their ultra-small form factor and the cable design that offers the flexibility of both bottom and side feed installation. Giving the option to use the Elements directly on a surface or to hide the cable from sight. They're easy to install, use and maintain due to the non-marking double-sided installation tape and high-quality finishing.

### X-DOT SERIAL INTERFACE



The X-Dot Serial interface connects a USB or serial port from a 3rd party device -such as a screen-, to any Nemosphere controller. This enables bi-directional communication between the connected 3rd party device and the Nemosphere Controller.

### X-DOT I/O INTERFACE



The X-Dot I/O is a versatile interface to be used with industry-standard push buttons with an embedded LED ring or with any other generic I/O device. The onboard LED controller offers full control over the LED behavior.

### X-DOT MOTION INTERFACE



The X-Dot Motion interface is to be used with an industry-standard 5V controlled PIR or IR-technology based sensor. Sensor models with various beam angles and detection ranges can be used on this small interface enabling seamless integration.

### X-DOT BUZZER INTERFACE



The X-Dot Buzzer is a dual interface for 5V buzzer/tweeter devices that can be implemented whenever triggering confirmation sounds is required in an installation. i.e. alarm functionality, beep confirmation of an executed action, or attention requested.



## XD RANGE | wired pick-up sensors

The Nemosphere X-Dot range offers a variety of functions divided into two subdivisions: easy interfacing and wired pick-up sensors. They share their ultra-small form factor and the cable design that offers the flexibility of both bottom and side feed installation. Giving the option to use the Elements directly on a surface or to hide the cable from sight. They're easy to install, use and maintain due to the non-marking double-sided installation tape and high-quality finishing.

### X-DOT X



The X-Dot X is a wired pick-up sensor that can also be used as an active security device. The sensor is mounted onto the merchandise using double-sided tape. When a product is lifted or placed back, the X-Dot sends a trigger to the connected Xperience controller. The security function sends triggers whenever merchandising is removed, the wire is cut or pulled out.

#### Wired pick-up sensor (accelerom.) Active security

white housing:

XDW-X16	pick-up only
XDW-X26	security only
XDW-X36	pick-up and security

XDW-X36C	pick-up and security coiled cable
----------	--------------------------------------

black housing:

XDB-X16	pick-up only
XDB-X26	security only
XDB-X36	pick-up and security

XDB-X36C	pick-up & security coiled cable
----------	------------------------------------

### X-DOT X SPARE TAPES



The X-Dot spare tapes can be used when merchandising is replaced on the POS because of maintenance reasons or the renewal of merchandise during seasonal rotation.

#### Double-sided tape

XAS-TX1	10-pack
XAS-TX5	50-pack
XAS-TX9	2750 roll

all	double sided industrial standard
-----	-------------------------------------



## XT RANGE | capacitive touch & mechanical buttons

The Nexmadiator X-Touch range can be applied when looking to integrate buttons. The implementation of buttons allows conversion from static digital signage, into interactive and responding presentations by having the shopper give input choices and selection options. Buttons that are fitted with programmable LEDs can invite the shopper to start interacting and make the shopper journey intuitive by giving visual feedback on the selected options.

### TOUCH BUTTONS




The X-Touch buttons are capacitive and detect a person's touch on the button or an overlying material. The technology works with multiple non-metal overlay materials, such as acrylic, glass, cardboard, and wood. They can be integrated into furniture without visually drawing away from the design. The button sensitivity can be adjusted, and they are available in various sizes and configurations.

#### Capacitive touch LED control

XT-4FW6	4 small buttons, linear
XT-4GW6	4 small buttons, rect.
XT-1EW6	1 small button
XT-1GW6	1 large button

all | fitted with button LEDs

### PUSH-BUTTON INTERFACE



The X-Touch button interface is a 4-channel push-button interface with LED control and can be used in combination with industry-standard push buttons. It allows the connection of up to four buttons onto a single interface. This results in the connection possibility of up to 9 push buttons even on the smallest Xperience Controller. Programmable LED output options are on, off, slow and fast blink.

#### Push-button interface LED control

XT-B4N6	4 interfaces 3.3V LED contr. easy click-in
---------	--

#### Push buttons (accessory item)

S-B90xxx	19mm standard
S-B95xxx	19mm value line

## CONTROLLERS

### connecting Elements



## XN-RANGE | nano Xperience controllers

### CONTROLLERS

Xperience controllers are used to combine Elements onto and connect them to any Digital Signage player or PC. The controller is the part of the system that translates the communication coming from the Elements to the connected device and vice versa. Some of the controllers have additional functionalities embedded into them such as LED control or audio switching.

### API

Each controller runs Nexmosphere's API. This API provides full control over all connected Elements to the Digital Signage player to which the controller is connected.

Each time a sensor is triggered, an API command is automatically sent from the Xperience controller to the Digital Signage player. Vice versa, actuators such as LED and audio switches can be easily controlled by sending API commands from the Digital Signage player to the Xperience controller.

All API commands are sent via serial communication. Both controllers with RS-232 serial interfacing as well as Serial-over-USB are available.

The Nexmosphere XN range offers Xperience Controllers in a small form factor making it ideal to use when space is limited and integration with other systems is required. Connect your Elements of choice and build a unique shopper journey; LED lighting that starts glowing when a shopper approaches, product info showed if a product is placed on an "info platform". Whichever interactivity suits your brand's story, create a lasting impression using the XN Xperience controller.

### XN-100 SERIES



The connection method to Nexmosphere's Elements is called X-talk. Calculate the number of X-talk channels needed by adding up the number of Elements used and pick the right model for the job. Nano controller models that are fitted with a MicroBay or onboard interface, offer an additional connection possibility for specific Elements. The Controllers are equipped with a USB or RS232 interface to integrate the sensor Elements with your connected device.

RS-232 interface X-talk only	USB interface X-talk only	USB interface X-talk & onboard interfacing
XN-180   8x X-talk	XN-135   2x X-talk	XN-135M3   2x X-talk, 1x Presence interf.
XN-185   8x X-talk	XN-135M8   2x X-talk, 1x X-Wave interf.	XN-165   2x X-talk, 1x 4 button interf.

### XN-RANGE ACCESSORIES



The Nexmosphere Nano range is complemented with the cables needed for communication and power supply. When using XN models with a USB interface, the USB port of the connected device also provides power to the Nexmosphere controller. Most USB ports supply enough power to the Elements without the need for additional power, except when connecting LEDs. When using LEDs consider the use of the USB split cable together with a power supply to provide enough power or consult us for advice. When using the XN models with a serial connection, the use of a power supply is always required.

#### USB cables

CA-UM4B	Micro-USB cable, 60cm
CA-UM6B	Micro-USB cable, 180cm
CA-US5B	Micro-USB split cable

#### Power supplies

PU-0520EU	EU, 5VDC/2A, USB
PU-0520US	US, 5VDC/2A, USB

#### Serial cables

CA-JJ9B	Jack 3.5 to Jack 3.5
CA-JD9B	Jack 3.5 to Sub-D9



## XC-RANGE | compact Xperience controllers

The Nemosphere XC range offers Xperience Controllers in a compact form factor while offering various onboard functionalities. Choose the right controller series based on the functionality needed, whether this is controlling multiple RGBW LED strips, pixel LED strips or (optical) audio switching. Combine this with Elements connected onto the X-talk channels to build your own unique experience.

### XC-700 SERIES



The 700 series is equipped with X-wave interfaces which allow connecting flexible pixel LED strips. X-Wave LED technology allows the user to select one of the numerous pre-programmed animation patterns and modify its parameters to fit the exact application, whether it's a gentle soft glow or a complex running light.

**X-Wave control**  
**X-Talk interface**  
**USB API interface**

XC-720	2x X-Wave interface, 4x X-talk
XC-741	4x X-Wave interface, 8x X-talk
XC-748	4x X-Wave interface, 4x X-talk, 2x RGBW LED output
XC-760	6x X-Wave interface, 4x X-talk

**new product**  
consult timing and availability

### XC-800 SERIES



The 800 series is equipped with fully dimmable RGBW LED outputs which allow connecting 12/24V LED strips. Transition smoothly between different colors and create just the right atmosphere with subtle lighting use in tailored RGBW LED colors.

**RGBW LED output**  
**X-Talk interface**  
**USB API interface**

XC-820	2x RGBW LED output, 4x X-talk
XC-841	4x RGBW LED output, 8x X-talk
XC-848	4x RGBW LED output, 4x XX-talk, 2x X-Wave interface
XC-860	6x RGBW LED output, 4x X-talk



## XC-RANGE | compact Xperience controllers

### XC-900 SERIES



The 900 series is equipped with audio switches to facilitate easy and seamless switching of an incoming audio stream from one speaker, soundbar or headphone to another. Both analog switches (3.5mm jack plug) and optical switches (Mini-Toslink) are available.

**Audio switching**  
**X-Talk interface**  
**USB API interface**

XC-931	4x optical switch, 8x X-talk
XC-937	4x optical switch, 4x X-talk, 2x X-Wave interface
XC-938	4x optical switch, 4x X-talk, 2x RGBW LED output
XC-941	4x analog switch, 8x X-talk
XC-947	4x optical switch, 4x X-talk, 2x X-Wave interface
XC-948	4x analog switch, 4x X-talk, 2x RGBW LED output

**new product**  
consult timing and availability

### XC-RANGE ACCESSORIES



The Nemosphere Compact range is complemented with the cables needed for communication and power supply. The Compact range controllers require a USB cable for communication and a power supply. Calculate the power consumption of the complete system or consult us for advice to pick the right power supply for your project.

#### Power supplies

PS-1220EU	EU, 12VDC/2A, 2.1mm
PS-1220US	US, 12VDC/2A, 2.1mm
PS-1250EU	EU, 12VDC/5A, 2.1mm
PS-1250US	US, 12VDC/5A, 2.1mm
PS-2425EU	EU, 24VDC/2.5A, 2.1mm
PS-2425US	US, 24VDC/2.5A, 2.1mm
PS-2438EU	EU, 24VDC/3.75A, 2.1mm
PS-2438US	US, 24VDC/3.75A, 2.1mm

#### USB cables

CA-UM4B	Micro-USB cable, 60cm
CA-UM6B	Micro-USB cable, 180cm



## XM-RANGE | modular Xperience controllers

The Nemosphere XM range offers Xperience Controllers in an configurable and extendable form factor making it ideal to use when functionality combinations which aren't available in the smaller ranges are required. This series consists of XM controllers and EM extension units, which are mounted together at our production facilities in order to offer you just the right functionality set for your project.

### XM CONTROLLERS



The Modular controllers are fitted with 1 X-talk channel on the unit itself and can support up to 5 Extension Modules and 8 Shop Modules. The Controllers are equipped with a USB or RS232 interface to integrate the sensor Elements with your connected device via our API.

**Modular architecture**  
**API interfacing**

XM-350 | RS-232 API interfacing  
XM-370 | USB API interfacing

### EXTENSION MODULES



The EM modules define the exact specification of the complete XM Xperience controller. Combine any of the modules into one system to make it fit the exact application needs. Different functionalities such as LED control, audio switching or large numbers of Element connections through X-talk channels can all be combined on a single XM controller. The EM modules are pre-assembled onto the XM controllers at our production facilities.

**Modular architecture**  
**Audio switching**

EM-1 | 1x audio input  
EM-4 | 4x audio switching  
EM-30 | 1x optical input  
EM-34 | 4x optical switching

**Modular architecture**  
**LED control**

EM-2 | 1x RGB LED output  
EM-5 | 5x mono LED output  
EM-6 | 5x RGB LED output

**Modular architecture**  
**Wireless X-talk**

EM-F1 | 1x wireless X-talk  
EM-F4 | 4x wireless X-talk  
EM-F8 | 8x wireless X-talk

**Modular architecture**  
**X-talk**

EM-7 | 4x X-talk  
EM-8 | 8x X-talk



## XM-RANGE | modular Xperience controllers

### SHOP MODULES



Shopbus Modules are specifically designed for two reasons; firstly, creating large systems where more interfaces are needed than one XM controller with connected EM modules can provide. And secondly; allowing large interspacing between several control units, when Elements are needed far apart from each other. The Shopbus architecture enables connecting multiple XM-like controller units together, with the possibility of using long cable lengths between the units. All the while, the interfacing towards the connected device can still take place through one serial communication connection.

X-talk	X-talk LED control
SM-100	8x X-talk
SM-200	16x X-talk
SM-300	24x X-talk
SM-400	32x X-talk
SM-500	40x X-talk
SM-600	48x X-talk

### XM-RANGE ACCESSORIES



The Nemosphere Modular range is complemented with the cables needed for communication and power supply. The XM controllers require a serial connection cable and a power supply. Depending on the Elements connected to the EM modules, additional power supplies might be required on individual EM modules. When using Shopbus modules, Shopbus cables are required between the units. Calculate the power consumption of the complete system or consult us for advice to pick the right power supply for your project.

#### Serial cables

CA-9J9B | RJ-9 to Jack 3.5mm  
CA-9D9B | RJ-9 to Sub-D9  
CA-9U9B | RJ-9 to USB

#### Power supplies (5V, XM controller)

PS-0520EU | EU, 5VDC/2A, 2.5mm  
PS-0520US | US, 5VDC/2A, 2.5mm  
PS-0550EU | EU, 5VDC/5A, 2.5mm  
PS-0550US | US, 5VDC/5A, 2.5mm

#### USB cables

CA-UM4B | Micro-USB cable, 60cm  
CA-UM6B | Micro-USB cable, 180cm

#### Power supplies (12-24V, LED modules)

PS-1220EU | EU, 12VDC/2A, 2.1mm  
PS-1220US | US, 12VDC/2A, 2.1mm  
PS-1250EU | EU, 12VDC/5A, 2.1mm  
PS-1250US | US, 12VDC/5A, 2.1mm  
PS-2425EU | EU, 24VDC/2.5A, 2.1mm  
PS-2425US | US, 24VDC/2.5A, 2.1mm  
PS-2438EU | EU, 24VDC/3.75A, 2.1mm  
PS-2438US | US, 24VDC/3.75A, 2.1mm

#### ShopBus cables

CAS-N9R | 200cm, red (power)  
CAS-N9B | 200cm, black  
CAS-NDB | 10m, black  
CAS-NHB | 25m, black

