

## XC-480 / 481 XPERIENCE CONTROLLER

### XC range

The nexmosphere compact range is the most cost-effective tool for bringing shopper experience into your retail environment. Its small form factor and smart design makes it an ideal and efficient controller to integrate in any virtual standalone application. Connect any of the nexmosphere elements such as presence sensors, pick-up detectors, touch buttons, or LEDs to build your own unique shopper journey. This system prepares itself for the next shopper automatically, ready to deliver the next in-store experience.



### XC-400 series

The 400 series enables shoppers to connect their own devices, such as a mobile phones, and play their favorite tracks in up to four different connected devices. Use the pick-up sensors or touch buttons to switch between the different outputs and compare them in an intuitive way. Create a unique setup to compare the different products on display with the shoppers' own favorite set of tracks.

### Features

- Audio input to connect an external audio source
- 4x switchable stereo audio channels
- 8x X-talk interface for easy sensor connection (4x X-talk+)

### X-talk interface

Connect a wide range of sensors, buttons, LEDs, or any of the nexmosphere elements to create your own unique shopper experience. Let your creativity be the limiting factor by combining the different elements specific to your application. Due to auto-configuration, there is no additional setup required for seamless operation. The X-talk interface also supports industry standard I/O devices, such as push buttons.

- Compatible with any of the nexmosphere elements
- Plug and smile interface
- Providing power to elements for easy system wiring
- Connect standard push buttons (NO/Normal Open)
- Switch external 3.3v LED (X-talk+ interface only)

### Audio Input

The audio input can be used to connect any 3rd party audio source (like a mobile telephone) to play the connected content via one or more of the Xperience controllers' audio outputs. Stereo line-in input via 3.5 mm stereo jack

### Audio switching

Audio switching redirects the audio stream from the MP3 player to one of the connected outputs. The solid state switching circuit guarantees a fast click-free transition from one output channel to another. Multiple outputs can be selected simultaneously to demonstrate multi-speaker solutions.

- 4x program controlled switchable stereo audio output
- Multiple outputs can be selected simultaneously
- Solid state technology for click-free switching
- Channels can be used as output as well as input
- Supports line-out as well as headphones (AutoDetect)

### Benefits

- Auto start-up and configuration for highly reliable standalone applications (24/7 operability)
- Automatic recovery to an attractive state after a period of inactivity
- Small form factor for easy installment in or behind displays
- Multiple data gathering functionalities offer unique insight into how your application is being used (DLX-200 X-talk data logger required)
- Download application-specific scripts to configure the controller according to your needs (\*programmable versions only)

*\* XSP-100 X-talk programmer required*

# XC-480 / 481 XPERIENCE CONTROLLER

## Thermal specifications

Operating temperature: +10°C...+40°C/ +50°F ... +104°F  
 Storage temperature: -20°C...+50°C/ -4°F ... +122°F  
 Cooling: Passive cooling (no moving parts)

## Electrical specifications

Operating voltage: 5VDC  
 Maximum power rating: 2A

## Standards and Certifications

Compliant with IEC 60950-1(ed.2);am1;am2  
 CE certificate  
 US/CAN certification in progress  
 RoHS compliant

## Miscellaneous


- Robust compact housing with screw brackets for secure fixing
- Build-in magnets for easy mounting on metal surfaces
- Both horizontal & vertical mounting allowed
- Diagnostic LED indicating potential issues
- Status LED indicating power & input/output operations
- 1 year warranty (optional 3 year extended warranty available)

## Packaging

Netto Weight: 113g  
 Items per carton 1 or 10 pcs


## Mechanical dimensions

LxWxH: 91 x 86 x 26 mm  
 Screw fixation: 20 / 40 x 85 mm

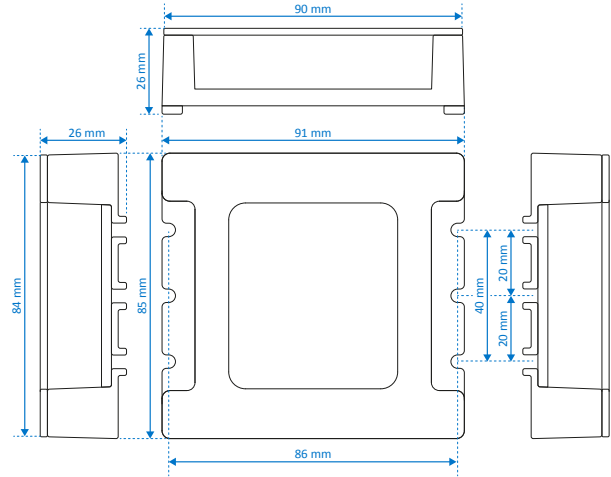

## Hardware interfaces

1. 3.5mm stereo Jack socket for Audio input
2. 5V Powerinput Micro USB
3. X-talk+ socket 1
4. X-talk+ socket 2
5. X-talk+ socket 3
6. X-talk+ socket 4
7. X-talk socket 5
8. X-talk socket 6
9. X-talk socket 7
10. X-talk socket 8
11. 3.5mm stereo Jack socket for Audio output 1
12. 3.5mm stereo Jack socket for Audio output 2
13. 3.5mm stereo Jack socket for Audio output 3
14. 3.5mm stereo Jack socket for Audio output 4

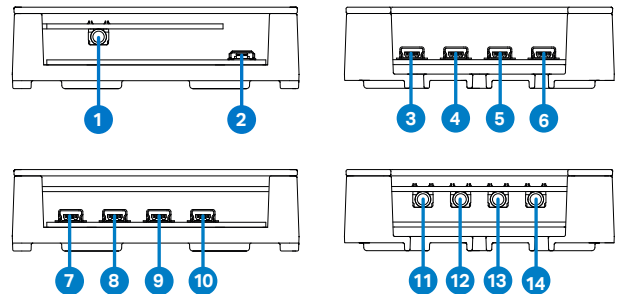

## Ordering information

Product ID	Description	Quantity
XC-480	Xperience controller, Audio in, 4x Audio switch, 8x X-talk (non programmable)	1 pc
XC-481	Xperience controller, Audio in, 4x Audio switch, 8x X-talk (programmable)	1 pc

## Nexmosphere

High Tech Campus 10 (Mμ building)  
 5656 AE Eindhoven • The Netherlands

T +31 40 240 7070  
 E sales@nexmosphere.com

© 2017 Nexmosphere. All rights reserved. v1.0 / 02-17  
 All content contained herein is subject to change without prior notice.