



XD-15 I/O INTERFACE

XD range

The Nexmosphere X-Dot range offers a variety of functions in an ultra-small form factor. The unique cable design offers flexible installation since its fitted with both bottom, and side feed options. Use the Element directly on a surface, or hide the cable under the X-Dot. It is simple to install, use and maintain due to the high-quality finishing and non-marking double-sided tape.

The X-Dot I/O is a versatile interface for any market-available push button with LED or any other generic 5.0V I/O device. The onboard LED controller offers smooth dimming of the connected LED for an attractive soft glow or pulsing patterns.



Features

- Ultra small form factor
- Interfaces with any standard market-available push button
- LED driver for 5.0V LED

X-talk

The X-Dot can easily be connected to any of the Nexmosphere Xperience controllers using the X-talk interface. All settings of the X-Dot are programmable on the Xperience controller, enabling a seamless integration in your application.

- Plug and smile interface
- Compatible with any Nexmosphere Xperience controller
- Powered by and programmable with Nexmosphere Xperience controller

Button interface & LED control

X-Dot I/O supports interfacing with standard market-available push buttons with an embedded LED. The LED controller on the X-Dot provides smooth dimming from 100–0%. Different standard glowing/pulsing patterns can be programmed to enable an attractive presentation.

- 3pin connection (Button, Ground, LED+)
- Wiring size AWG 22-26, solid/stranded copper
- Wire strip length: 4-5,5 mm
- Programmable glowing/pulsing patterns with variable speed and LED intensity

Benefits

- Unique cable connection (bottom feed or side feed) enables invisible cable installation
- Securely mounts on any flat surface, horizontal, vertical or angled
- Easy removable non-marking double sided tape
- Status LED for visual feedback
- Multiple data gathering functionalities on the Xperience controller offer a unique insight into traffic
- Interfaces with any 3rd party 5.0V I/O device



XD-15 I/O INTERFACE

Thermal specifications

Operating temperature: +10°C...+40°C/ +50°F ... +104°F
 Storage temperature: -20°C...+50°C/ -4°F ... +122°F

Electrical specifications

Operating voltage: 5VDC (via X-talk interface)
 Power consumption: 200mA
 Max LED output current: 150mA
 Output voltage: 5.0V

Miscellaneous

- Three cable lengths available (60/120/180cm)
- Custom colors and cable length available on request
- 1 year warranty (optional 3 year extended warranty available)

Packaging

Items per carton 1, 10 or 50 pcs


Standards and Certifications



RoHS
compliant


Mechanical dimensions

LxWxH: 37,3 x 22 x 10 mm (sensor interface)
 Fixation: Interface: Double sided adhesive tape

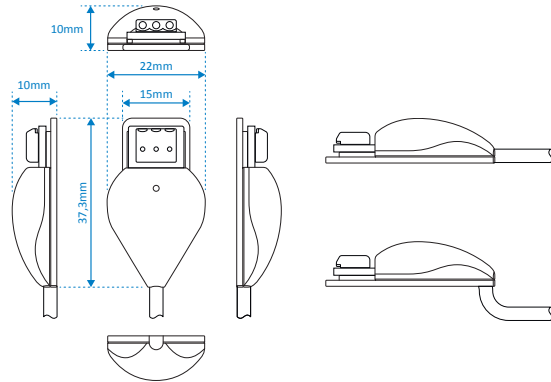

Pinout

- | | |
|-----------|---------------------------------|
| 1. Input | 5.0V= push (1), GND=no push (0) |
| 2. Ground | LED - |
| 3. +5.0V | LED + |



Ordering information

<i>Product ID</i>	<i>Description</i>	<i>Netto weight</i>	<i>Quantity</i>
XDW-I54	X-Dot Button interface, LED dimmer 5.0V, White, 60cm	13g	1 pc
XDW-I55	X-Dot Button interface, LED dimmer 5.0V, White, 120cm	19g	1 pc
XDW-I56	X-Dot Button interface, LED dimmer 5.0V, White, 180cm	22g	1 pc

Nexmosphere

High Tech Campus 10 (Mμ building)
 5656 AE Eindhoven • The Netherlands

T +31 40 240 7070
 E sales@nexmosphere.com

© 2017 Nexmosphere. All rights reserved. v1.0 / 02-17
 All content contained herein is subject to change without prior notice.