



X-SNAPPER XS SERIES

X-Snapper range

The Nexmosphere X-Snapper range offers magnetic pick-up sensors that can also be used as active security devices. Merchandise is mounted onto the sensor and when lifted or placed back, the X-Snapper sends a trigger to the connected Xperience controller, facilitating content triggering and measurement of pick-up durations. The security function sends triggers whenever merchandise is removed, the wire is cut or pulled out. This sensor is specially designed to attach to handheld devices of different sizes and shapes.



XS series

The XS-Snapper detects either release from, or connection with, -its passive counter block and sends triggers to the connected Xperience controller accordingly, both registering pick-ups and place downs. Use the XS-Snapper for presenting smaller, handheld devices such as shavers, toothbrushes or phones.

Features

- Magnetic pick-up detection sensor
- Active product security
- Auto-calibration

X-talk

The XS-Snapper can easily be connected to any of the Nexmosphere Xperience controllers using the X-talk interface. All settings of the sensor are programmable on the controller, enabling a seamless integration in your application.

- Plug and smile interface
- Compatible with any Nexmosphere Xperience controller
- Powered by and configurable with Nexmosphere Xperience controller

Pickup detection

The sensor registers release from, or connection with, -its passive counter block. Both events will be sent as triggers from the Xperience controller to the connected media player, for example, to start a video or illuminate a string of LEDs.

- Pick-up and place-down registration
- Highly responsive

Security

The alarm gets triggered if the merchandise is removed; cables are cut or removed from the Xperience controller. The micro-optical sensor has no moving parts eliminating false alarms caused by commonly used micro-switches.

- No mechanical moving parts that break by intense use
- Easy to setup and maintain (plug and secure)
- Status LED clearly indicates alarm status (programmable/dimmable on Xperience controller)

Benefits

- 4 strong neodymium magnets ensure that the product always returns to its original position
- Securely mounts on any flat surface, horizontal, vertical, or angled
- Light and flexible cable allows customers to experience the real weight and feel of the merchandise
- Easy removable non-marking double-sided tape
- Status LED for visual feedback

X-SNAPPER XS SERIES

Mounting specifications

Adhere the sensor to the merchandise using the double-sided adhesive tape on the flat bottom side.

Thermal specifications

Operating temperature: +10°C...+40°C/ +50°F ... +104°F
Storage temperature: -20°C...+50°C/ -4°F ... +122°F

Electrical specifications

- Operating voltage: 5V DC (via X-talk interface)
- Power consumption: 50mA

Miscellaneous

- Custom cable lengths available on request (MOQ 50pcs)
- 1-year warranty (optional 3-year extended warranty available)

Packaging

Items per carton 1, 10 or 50 pcs


Standards and Certifications



RoHS
compliant

Mechanical dimensions

LxWxH: 46 x 23 x 10,3 mm
Screw fixation: Double-sided adhesive tape

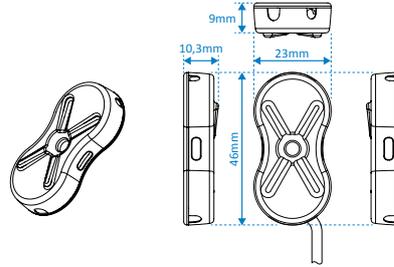

Ordering information

Product ID	Description	Netto weight	Quantity
XSW-X16	X-Snapper, Pick-up only, 180cm cable, white	42g	1 pc
XSW-X26	X-Snapper, Security only, 180cm cable, white	42g	1 pc
XSW-X36	X-Snapper, Pick-up & Security, 180cm cable, white	42g	1 pc
XSW-NOS	X-Snapper single, standard strength, white	11g	1 pc
XSB-X16	X-Snapper, Pick-up only, 180cm cable, black	42g	1 pc
XSB-X26	X-Snapper, Security only, 180cm cable, black	42g	1 pc
XSB-X36	X-Snapper, Pick-up & Security, 180cm cable, black	42g	1 pc
XSB-NOS	X-Snapper single, standard strength, black	11g	1 pc

Nexmosphere

High Tech Campus 10 (Mμ building)
5656 AE Eindhoven • The Netherlands

T +31 40 240 7070
E sales@nexmosphere.com

© 2017-2020 Nexmosphere. All rights reserved. v1.0 / 02-20
All content contained herein is subject to change without prior notice.